


为 您 的 产 品 保 驾 护 航

PRODUCT DATASHEET

Blade Fuses

JFP0908 Micro2 Blade Fuse Devices

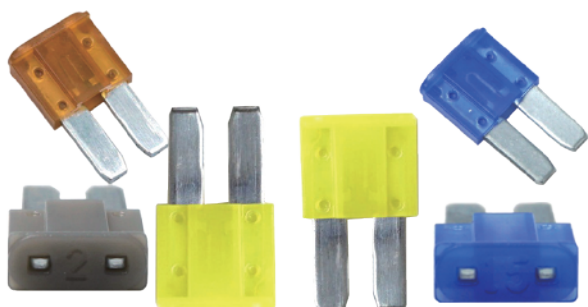

Description

The JFP0908 Micro2 Blade Fuses standard applies to vehicle series fuses below 32V.


Performance Specification



Model	Current Rating (A)	Interrupting Rating	Voltage Rating	Max.Voltage Drop(mV)	Cold Resistance (mΩ)	Housing Material Color
JFP0908-2A	2.0	1000A @32VDC	32V DC	200	36.6	灰绿色
JFP0908-3A	3.0			175	31.24	玫红色
JFP0908-5A	5.0			175	17.0	黄褐色
JFP0908-7.5A	7.5			150	11.3	茶色
JFP0908-10A	10.0			125	8.60	红色
JFP0908-15A	15.0			125	6.25	蓝色
JFP0908-20A	20.0			125	4.50	黄色
JFP0908-25A	25.0			110	3.67	透明色
JFP0908-30A	30.0			100	3.10	绿色
JFP0908-35A	35.0			90	2.75	紫色
JFP0908-40A	40.0			85	2.43	粉红色

Time-Current Characteristics

% of Rating	Opening Time
110%	4h min
135%	0.75s~1800s
200%	0.15s~5s
350%	0.04s~0.5s
600%	0.02s~0.1s

Temperature Derating Curve

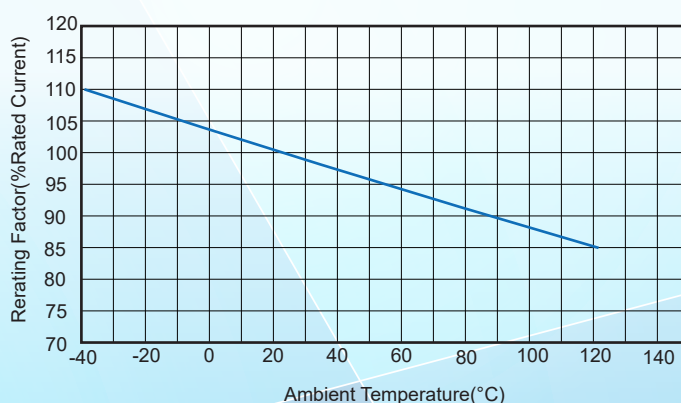

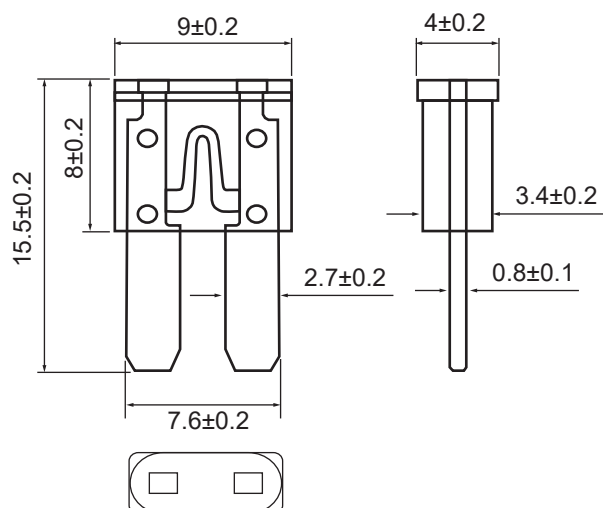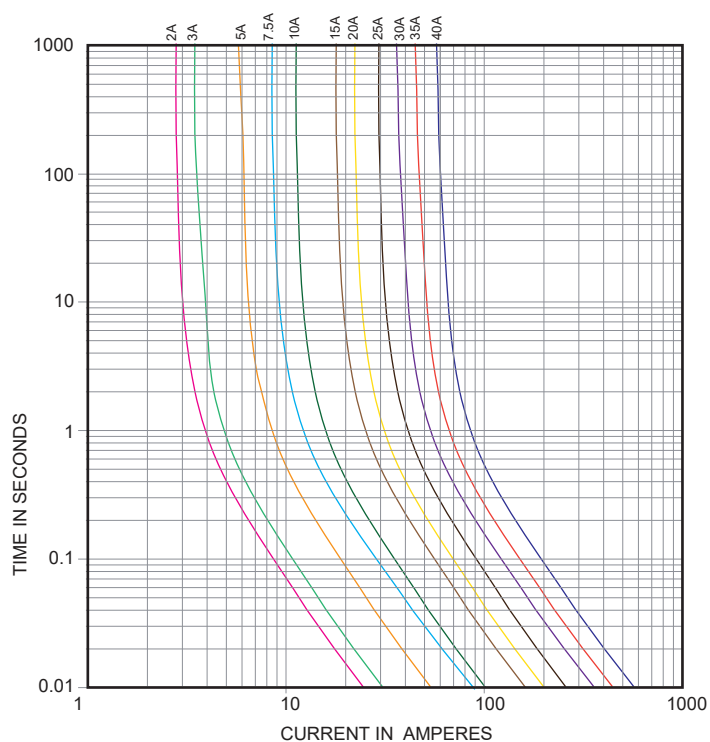Time-Current Characteristic Curves
Dimensions (mm)

Specification

Operating Temperature	Terminals	Housing Material
$-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$	zinc alloy	PC

Packaging Quantity

Model	QTY
JFP0908 Series	1000 pcs/bag